


Polywater®

Type WLD™



GAS LEAK DETECTION FLUID

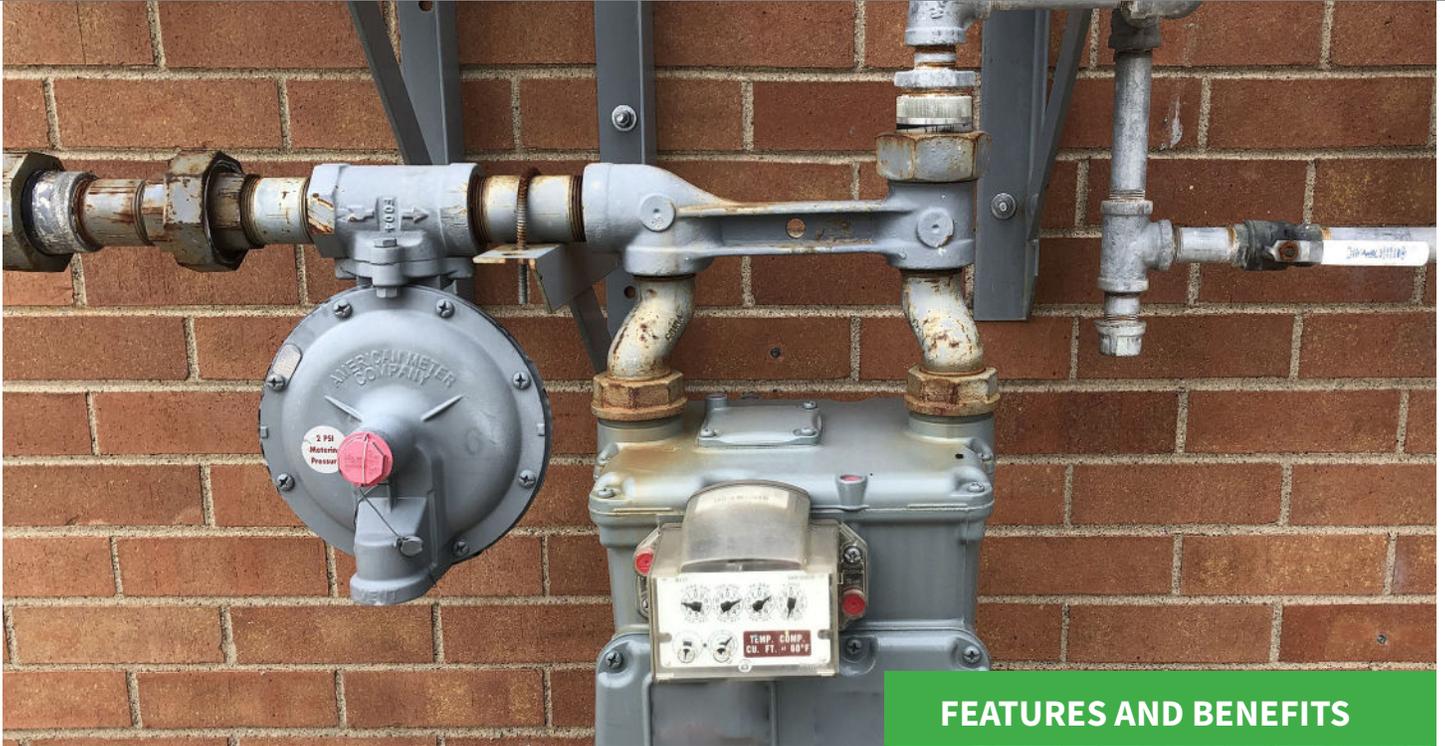

Detect Gas Leaks of Any Size in the Toughest Environments

Polywater® Type WLD™ is specially formulated to detect small, large, and difficult-to-identify air and gas leaks. The packaging design allows precise directional application. It coats and clings to all types of vertical surfaces. It can be used in a range of environments and temperatures. Polywater Type WLD is non-toxic and contains no chlorine, aliphatic amines, glycol ether, or ammonium compounds.



FEATURES AND BENEFITS

- **SUPERIOR PERFORMANCE**
Excellent wetting to plastics and metals
- **MAXIMUM COVERAGE**
Fully coats, and stays wetted to vertical surfaces, including PE, PVC and steel pipes
- **SAFE**
Non-toxic, non-flammable and non-corrosive—Does not contain glycol ether
- **SPECIALLY FORMULATED**
Dries clean without staining
- **ACCURATE DELIVERY SYSTEM**
Convenient flip-top package allows for easy application and storage

polywater.com | +1 651-430-2270

Polywater® Type WLD™



CATALOG #	PACKAGE DESCRIPTION	UNITS/CASE
WLD-35LF	1 quart (0.95 L) Bottle with Flip Top	12
WLD-128	1 gal (3.86 L) Jug	4



SPECIFICATIONS AND APPLICATIONS

- **Application:** Open the flip-top cap and squeeze WLD onto the suspected leak area. Watch for new bubbles to form. Mark the leak and wipe dry for repair.
- **Temperature Use:** All-season formula has a broad temperature use range: -30°F to 158°F (-34°C to 70°C), making it the perfect solution for detecting leaks in any environment.
- **Tested:** Long-lasting foam as tested by ASTM D1173. 150 mm in 1 minute and 130 mm after 5 minutes.
- **Properties:** WLD has excellent cling to PE, PVC, and steel. Vertical cling using a 10-mil (0.3 mm) coating held at 90° for 5 minutes retains >98% coating without non-wetting or drying.

polywater.com | +1 651-430-2270

IMPORTANT NOTICE: The statements here are made in good faith based on tests and observations we believe to be reliable. However, the completeness and accuracy of the information is not guaranteed. Before using, the end-user should conduct whatever evaluations are necessary to determine that the product is suitable for the intended use.

American Polywater expressly disclaims any implied warranties and conditions of merchantability and fitness for a particular purpose. American Polywater's only obligation shall be to replace such quantity of the product proven to be defective. Except for the replacement remedy, American Polywater shall not be liable for any loss, injury, or direct, indirect, or consequential damages resulting from a product's use, regardless of the legal theory asserted.

© 2022 American Polywater Corporation LIT-WLDFLYER/REV000

Polywater®
Solutions at work.

American Polywater Corporation
11222 60th Street N.
Stillwater, MN 55082 USA

+1 651-430-2270 Main
+31 10 233 0578 Europe, Middle East, N. Africa
email: support@polywater.com